




Family: Hampton | Item No. 3209 AN/BR



Drawing 1 - Fixture Assembly



Drawing 2 - Fixture Assembly

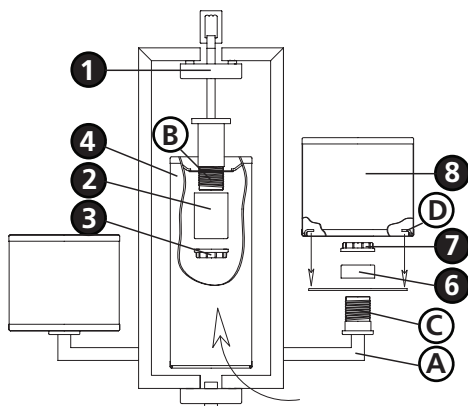

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body structure, installing the mounting hardware to the junction box, hanging the fixture from the ceiling, and then completing the fixture assembly.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Rotate the three uprights (A) until they are approximately 120 degrees apart - see **Drawing 1**.
2. Remove socket ring (3) and spacer (2) from socket (B) located below the center body assembly (1) - see **Drawing 2**.
3. Slip shade (4) over socket (B) and hold in position.
4. Slip spacer (2) and thread socket ring (3) onto socket (B) to secure shade (4).
5. Refer to hanging instruction sheet (I.S.19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

3

1. Remove socket ring (7) and spacer (6) from socket (C) located at the end of arms (A) - see **Drawing 2**.
2. Slip acrylic lens (5) over socket (C).
3. Slip spacer (6) and thread socket ring (7) onto socket (C) and tighten to secure acrylic lens (5).
4. Fixture can now be lamped accordingly.
5. Slip shade (8) over bulb and socket (C), making sure the small tabs (D) rest on the acrylic lens (5).

Note: Maximum wattage for 3209 fixture is 100 watts per bulb.

10.21.09