



Family: Sussex | Item No. 4796 EZ



Drawing 1 - Fixture Assembly

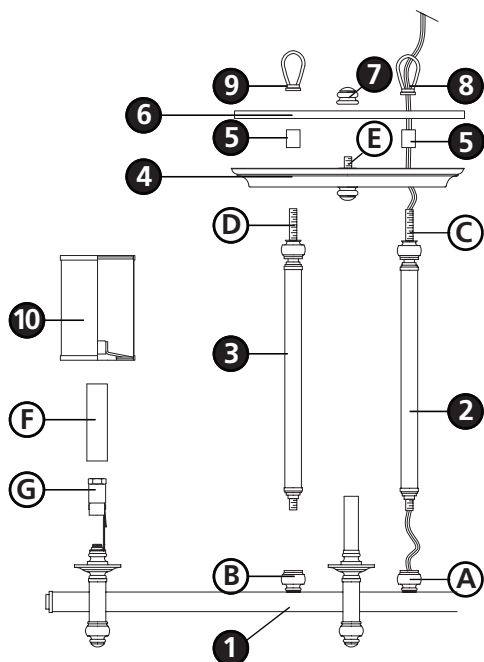

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first preparing the fixture for mounting, installing the mounting hardware, making all necessary electrical connections, hanging the fixture from the ceiling and then installing the fixture shades.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Slip column (2) along wire and thread into decorative coupler (A) located on the main body (1).
2. Thread column (3) into decorative coupler (B) located on main body (1).
3. Slip secondary canopy (4) along wire and over threaded tubes (C) and (D) respectively, of columns (2) and (3).
4. Slip spacers (5) over threaded tubes (C) and (D).
5. Slip canopy cover (6) along wire and over threaded tubes (C) and (D) and then over center tubing (E).
6. Thread decorative knob (7) onto center tubing (E) and tighten to secure canopy (6).
7. Slip loop (8) along wire and thread onto threaded tube (C).
8. Thread loop (9) onto threaded tube (D).
9. Please refer to the hanging instruction sheet (I.S. 19-75) provided to hang fixture. Then refer back to this sheet to install glass.

3

1. Slip candle sleeve (F) over socket (G).
2. Slip shade harp (10) over end of candle sleeve (F).
3. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4796 fixture is 60 watts per bulb.

5.14.08