


Type _____
 -10 -11 -13
 P3562

Catalog No.	Finish			Lamping	Socket	Dimensions (Inches)	
	Polished Brass	Antique Brass	Brushed Steel			A	B
P3562	-10	-11	-13	2-13w Twin CF	GX23	15-1/4	4-5/8

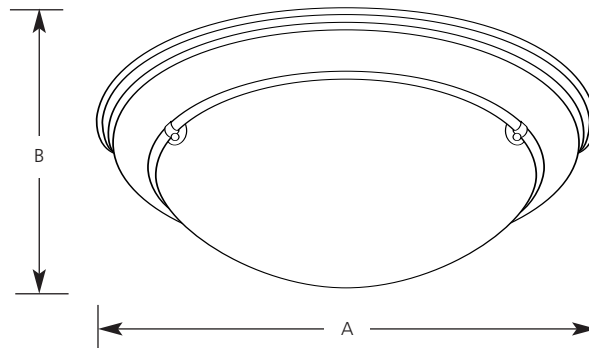

Specifications:

General

- Flush mount design
- Steel construction with Polished Brass (-10) or Brushed Steel (-13) finish
- Satin white glass
- Companion foyer, semi-flush and wall sconce

Mounting

- Ceiling mount
- Covers outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy mounting
- (3) glass retaining clips

Electrical

- 120V, HPF ballasts


- Pre-wired

Labeling

- UL-CUL listed

Type _____
 -10STR -13STR
 P3562

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	Polished Brass	Brushed Steel		A	B
P3562	-10STR	-13STR	2-13w Quad CFL (4 Pin)	15-1/4	4-5/8

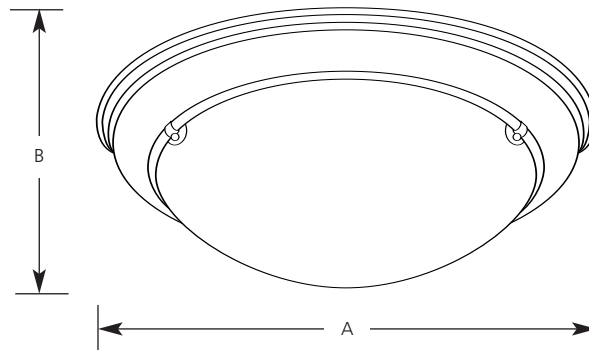

Specifications:

General

- Satin white glass
- Polished Brass (-10) or Brushed Steel (-13) plated finishes
- Units comply with Energy Star requirements
- Steel construction
- Interior of pan is white for maximum light output
- Companion foyer, semi-flush and wall sconce

Mounting

- Ceiling mount
- Fixture housing covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy fixture mounting
- (3) glass retaining clips

Electrical

- Pre-wired
- 120v NPF electronic ballast
- G24q-1 sockets

Labeling

- UL-CUL listed






Compact Fluorescent

Eclipse Collection
Electronic Ballast

Close-to-Ceiling

Type _____
 -10EB -11EB -13EB
 P3562

Catalog No.	Finish			Lamping	Socket	Dimensions (Inches)	
	Polished Brass	Antique Brass	Brushed Steel			A	B
P3562	-10EB	-11EB	-13EB	2-13w Quad CF (4 pin)	GX24q-1	15-1/4	4-5/8

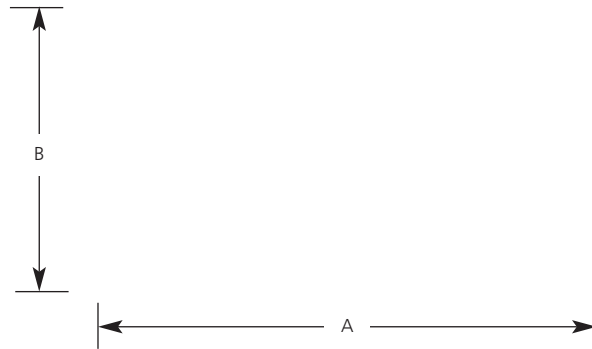

Specifications:

General

- Flush mount design
- Steel construction with Polished Brass (-10), Antique Brass (-11) or Brushed Steel (-13) finish
- Satin white glass
- Companion foyer, semi-flush and wall sconce

Mounting

- Ceiling mount
- Covers outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy mounting
- (3) glass retaining clips

Electrical

- 120/277V, HPF electronic ballast
- Pre-wired

Labeling

- UL-CUL listed

