



Linear Fluorescent

Soft Clouds

Bath & Vanity

T8 Electronic Ballasts

Energy Star

Type _____


-60EB

P7114

P7115

P7116

Catalog No.	Finish	Lamping	Ballast	Dimensions (Inches)		
	White			A	B	Depth
P7114	-60EB	2-F17T8	HPF	26-3/4	6	4-1/4
P7115	-60EB	2-F25T8	HPF	38-3/4	6	4-1/4
P7116	-60EB	2-F32T8	HPF	50-3/4	6	4-1/4

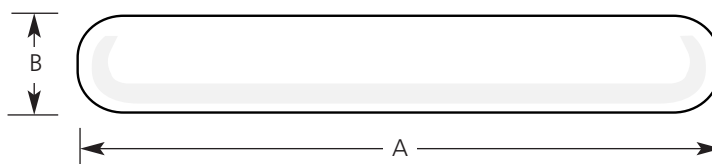

Specifications:

General

- One piece vacuum formed white acrylic diffuser
P7114: 26-11/16" L x 5-15/16" ht., 4-5/8" D
P7115: 38-7/8" L x 5-15/16" ht., 4-5/8" D
P7116: 50-7/8" L x 5-15/16" ht., 4-5/8" D
- Diffuser held in place with screws in ends
- Lamps are mounted to provide light out and down
- Unit can be mounted horizontally or vertically
- Damp location listed
- Energy Star certified

Housing

- White chassis complete with ends
- Cover plate
- 1/2" KO in back center, and one near each end for wiring
- Keyhole KO's on back near each end for mounting
- 2-3/4" width covers a standard switch outlet box

Electrical

- Bi-pin twist-in sockets for T8 lamps
- 120V electronic HPF two lamp ballasts (277V available on request)

Labeling

- UL-CUL listed



Progress Lighting
701 Millennium Boulevard
Greenville, SC 29607

www.progresslighting.com

Rev. 7/09