



Linear Fluorescent

**Wrap-Arounds**  
**Energy Star**  
**T8 Electronic Ballasts**

**Modular Fluorescent**

Type \_\_\_\_\_



-30EB

P7183

P7186

P7196

Catalog No.	Finish White	Lamping	Dimensions (Inches)	
			A	B
P7183	-30EB*	2-F17T8	7-3/4	24
P7186	-30EB	2-F32T8	7-3/4	48
P7196	-30EB	4-F32T8	15-5/8	48

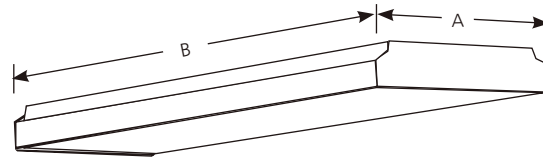

**Specifications:**

General

- Clear extruded prismatic acrylic wrap around lens  
P7183: 23-11/16" L x 1-1/32" ht., 7-1/2" W  
P7186: 47-7/8" L x 1-7/16" ht., 7-1/2" W  
P7196: 47-7/8" L x 1-13/16" ht., 14-3/8" W
- Lift and shift removal of lens for relamping and servicing
- Regressed reveal gives floating effect
- Squared white metal end caps
- White steel chassis
- Sockets metal backed
- Easily removable cover for ballast access
- Energy Star certified

Mounting

- Ceiling mounted, individual or continuous run
- Covers any outlet box

Electrical

- 120V HPF electronic ballasts
- Bi-pin twist in lamp holders

Labeling

- UL-CUL damp location listed

\*Non-stocking





Progress Lighting  
701 Millennium Blvd.  
Greenville, South Carolina  
29607

www.progresslighting.com

Type \_\_\_\_\_  
-30ES  
P7186

Catalog No.	Finish	Lamping	Dimensions (Inches)	
	White		A	B
P7186	-30ES	2-F34T12	7-3/4	48

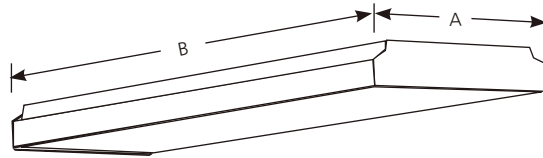

**Specifications:**

General

- Clear extruded prismatic acrylic wrap around lens  
P7186: 47-7/8" L x 1-7/16" ht., 7-1/2" W
- Lift and shift removal of lens for relamping and servicing
- Regressed reveal gives floating effect
- Squared white metal end caps
- White steel chassis
- Sockets metal backed
- Easily removable cover for ballast access
- Recommend energy saving T12 lamps

Mounting

- Ceiling mounted, individual or continuous run
- Covers any outlet box

Electrical

- 120V HPF electronic ballasts
- Bi-pin twist in lamp holders
- Parallel lamp operation

Labeling

- UL-CUL damp location listed