



Incandescent

# 6" Open Trim for Shallow Fixture IC & Non-IC


Recessed

Type \_\_\_\_\_

-28

P8073

Catalog No.	Finish	Dimensions (Inches)	
	White	A	B
P8073	-28	7-3/4	4-3/8

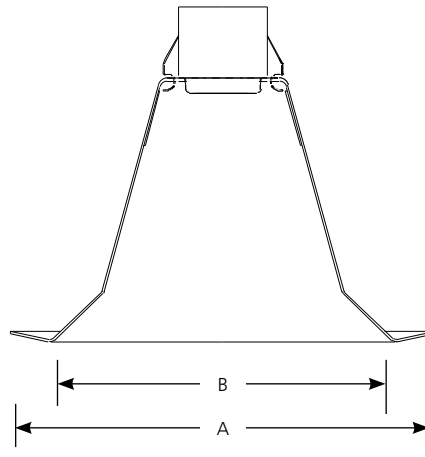

### Lamp Wattage

Housing	IC	Non-IC
P86-TG	75R/PAR30/65BR30	75R/PAR30/65BR30
P186-TG	75R/PAR30/65BR30	75R/PAR30/65BR30

### Specifications:

#### Flange

- Bright white powder painted flange
- No light leaks around trim flange
- Covers irregular ceiling openings

#### Trim

- One-piece aluminum reflector
- Splay design for BR and PAR 30 lamps
- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position

#### Options

- White reflector - specify "28" after catalog number

#### Labels

- UL-CUL damp location listed

Progress Lighting  
 701 Millennium Blvd.  
 Greenville, South Carolina  
 29607

www.progresslighting.com

Rev. 9/09











Incandescent

**6" Lensless Shower Light  
IC & Non-IC**


**Recessed**

Type \_\_\_\_\_

-28

P8073WL

Catalog No.	Finish	Dimensions (Inches)	
	White	A	B
P8073WL	-28	7-3/4	4-3/8

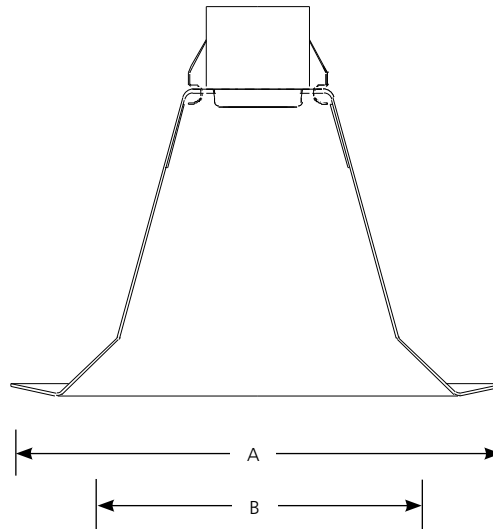

**Lamp Wattage\***

Housing	IC	Non-IC
P86-TG	50w PAR30	50w PAR30
P186-TG	50w PAR30	50w PAR30

**Specifications:**

Flange

- Bright white powder painted integral metal flange
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- All aluminum construction
- Socket mounts to trim for optimum performance and consistent lamp position
- Trim retention is provided by a heavy duty spring steel clip shipped with housing

- Pre-applied adhesive backed, high-temperature acrylic gasket is placed on interior top portion of reflector to prevent the passage of water into socket

Labels

- UL-CUL wet location listed
- Rated IC and Non-IC

\*Use only outdoor rated par lamps.

Progress Lighting  
701 Millennium Blvd.  
Greenville, South Carolina  
29607

www.progresslighting.com

Rev. 9/08