





Compact Fluorescent

**4" Housing
Single Vertical CFL
IC/Air-Tight/ENERGY STAR**

Recessed

Type _____
P830-18ICAT

Catalog No.	Lamping	Dimensions (Inches)		
		A	B	C
P830-18ICAT	18W 4-Pin Triple Tube CF	9-3/4	7-1/2	5-1/2
		Ceiling Opening 4-1/2		

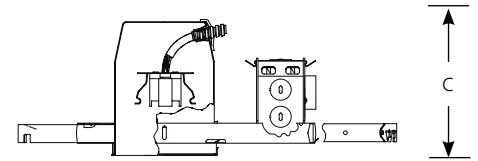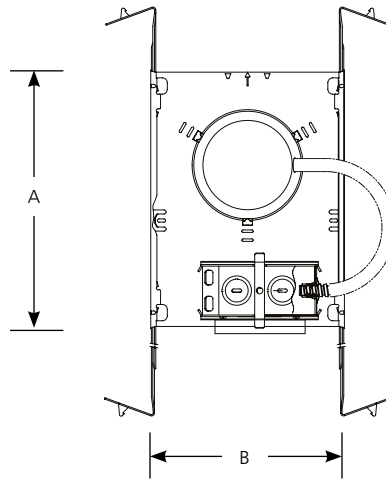

Specifications:

Wiring

- Removable housing for field inspection of wiring
- Universal J-box with snap-out sides
- Grounding pigtail
- Tool free integral Romex clamps
- Six 1/2" & two 3/4" Knock outs for rigid conduit or BX fittings
- Electronic NPF 120V Ballast

Construction

- Notched housing for chalkline alignment
- Overspray protection
- Full wrap-around plaster frame
- Housing adjusts from 1/2" to 2-1/2" thick ceilings

Bar Hangers

- Integral nailers for wood joist construction
- Integral T-bar mounting clamps

- Span 24" T-bar spacing
- Lock to secure housing
- Captive
- 90-degree mounting for tight spaces

Labeling

- UL-CUL listed for damp location
- IC rated.

Lamp/Trim

- Socket mounts to trim for optimum performance and consistent lamp position
- Leaf spring included with trim includes patented "Hurricane" design to allow for ease of installation and trim removal by rotating counter-clockwise
- GX24-q socket base



Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 9/09